


Metals for Medical

STRIP COIL CAPABILITIES



We Deliver Precision®

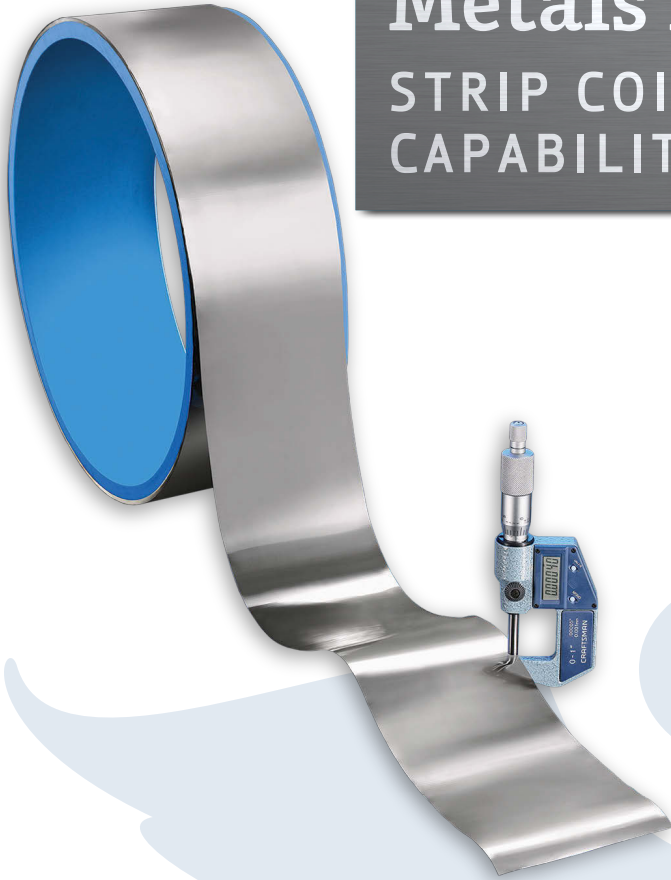

Slitting Capabilities*

Gauges .0004 inch – .125 inch (0.010 – 3.175 mm)

Width .020 – 48 inch (0.508 – 1220 mm, Ribbon Wound)

Width .125 – 1.5 inch (3.175 – 38.1 mm, OSC Wound)

* The full range of widths can not be produced on all thicknesses.

Packaging

■ Oscillate Wound ■ Ribbon Wound ■ Cut to Length

Medical Grade Alloys

■ Stainless Steels

301 | 304 | 305 | 410 | 420 | 440A | 17-7PH | 17-4PH

■ Specialty Metals

Niobium Type 1 | Nickel 201 | Inconel® 625 | Haynes® 25 (L-605)²

■ Titanium

Gr 1 | Gr 2 | Gr 3 | Gr 4 | Ti 3-2.5 Gr 9 | Ti 15-3-3-3

¹ Trademark of Special Metals Corporation group of companies. ² Trademark of Haynes International, Inc.

#1 Round Edge

No. 1

#3 Slit Edge

No. 3

#5 Square Edge

No. 5

Strip Applications

■ Hypodermic Needles and Shields

■ Implantable Housings:

Pacemakers | Hearing Aids | Defibrillators

■ Staple Guns

■ Endoscopic Products

■ Surgical Instruments



ULBRICH STAINLESS STEELS
& SPECIAL METALS, INC.

(800) 243-1676

INFO@ULBRICH.COM

ULBRICH.COM